






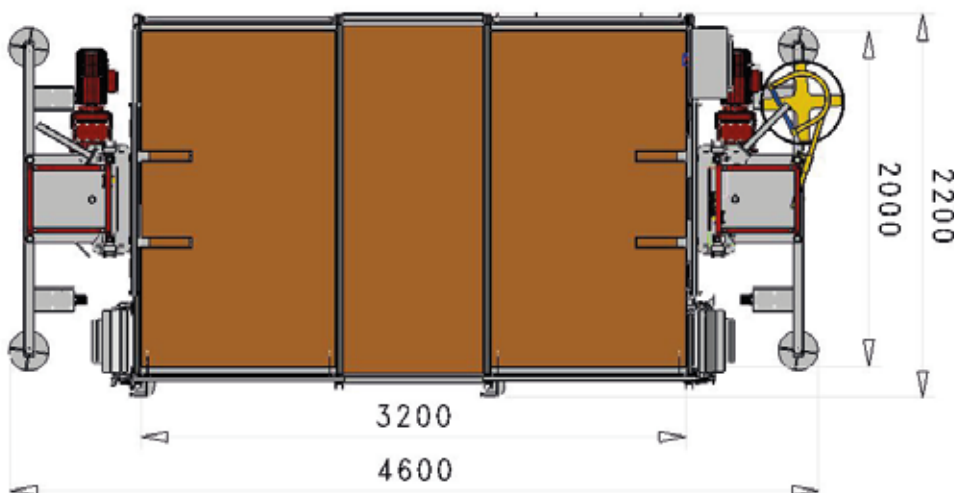



62 kg

MODULI VERTICALI QUADRATI

CAPACITÀ DI CARICO

	2400 kg	M
	+ 2320 kg	P+M
	+ 2240 kg	P+M
	+ 2160 kg	P+M
	+ 2080 kg	P+M
	+ 2000 kg	P+M
	+ 1920 kg	P+M
	+ 1840 kg	P+M



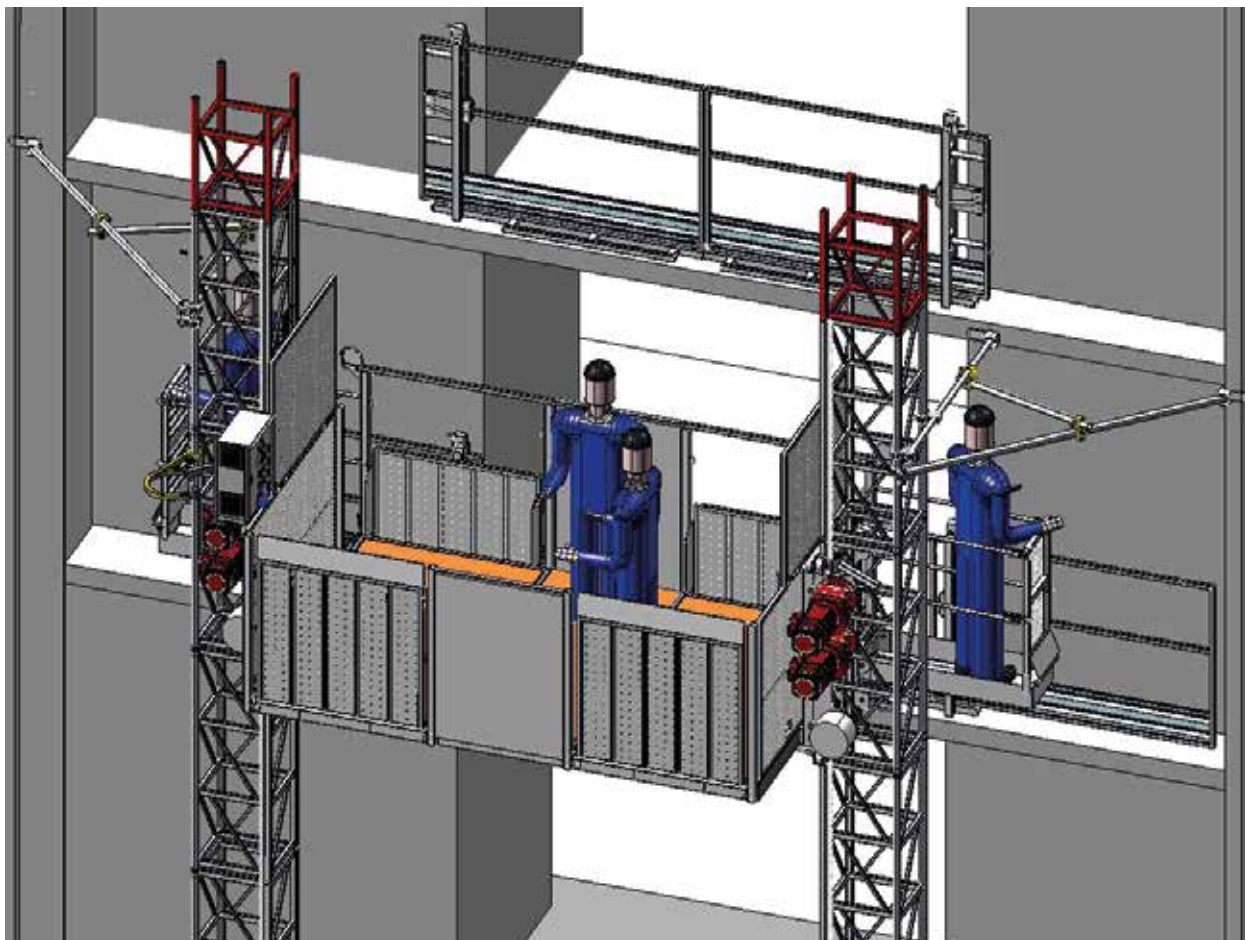

DATI TECNICI	TECHNICAL DATA	DONNEES TECHNIQUES	DATOS TECNICOS	PT 2400 TWIN TRIFASE
capacità di carico	capacity	charge nominale	capacidad de carga	2400 kg
velocità di sollevamento	lifting speed	vitesse de lévage	velocidad de elevación	12 m/min
massima altezza ancorata	max anchored height	hauteur max avec ancrages	altura max con anclajes	120 m
dimensioni interne cesta	platform dimensions	dimensions du plancher	dimensiones de cabina	3,2x2m
tensione alimentazione	input power range	tension d'alimentation	tensión de red	400 V 50 Hz
potenza motori	power of the motors	puissance des moteurs	potencia de motorreductores	4x2,2 kW
minima potenza di linea consigliata	minimum line power suggested	min. puissance de ligne conseillée	min. potencia linea	10kW
peso unità base	base unit weight	poids unité de base	peso unidad de base	1400 kg
ingrassatore automatico cremagliera	rack automatic greasing pump	graisseur automatique de cremallere	engrassador automatico de cremallera	su richiesta
sistema di sovraccarico	overload system	limiteur de charge	limitador de carga	✓