
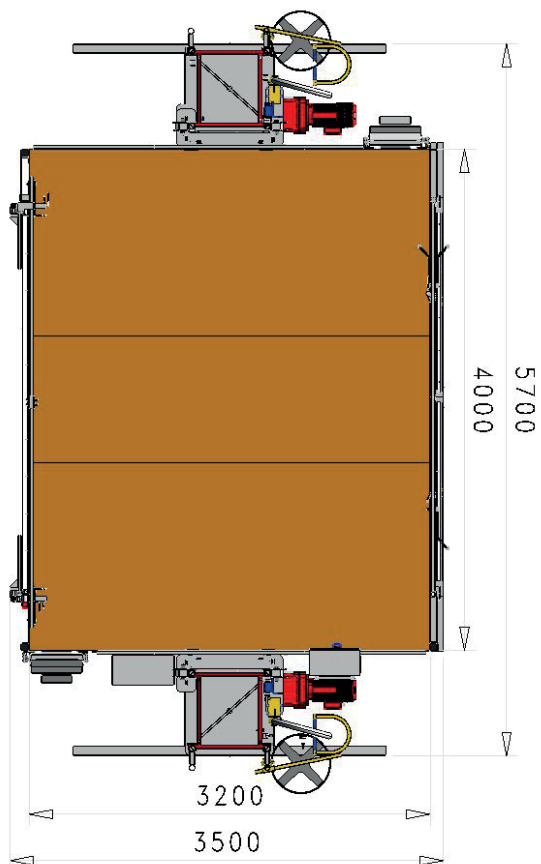



MODULI VERTICALI
QUADRATI

PIANALE MODULARE

3,2 x 4 m


3,2 x 3 m

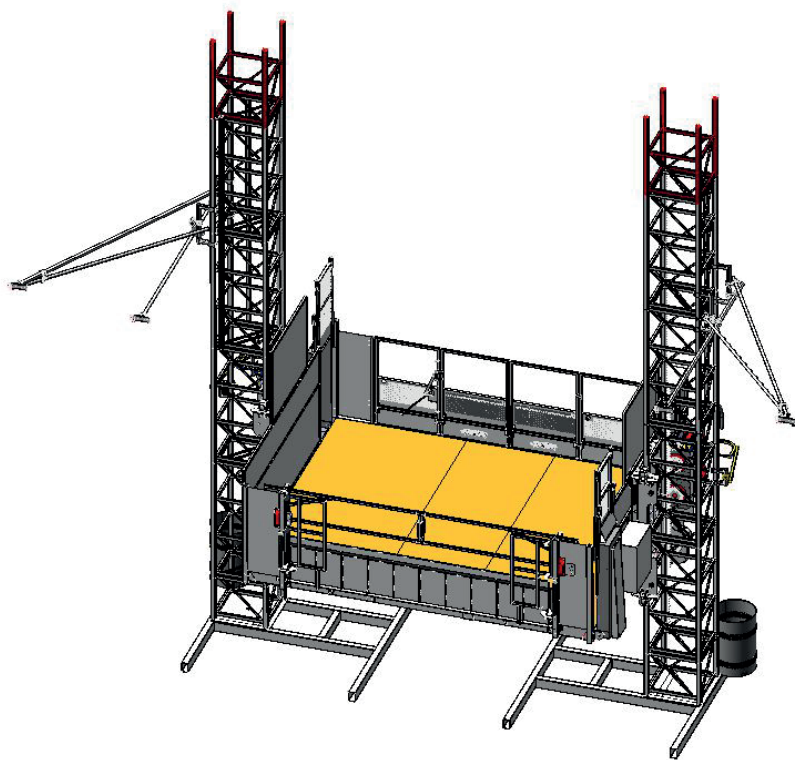

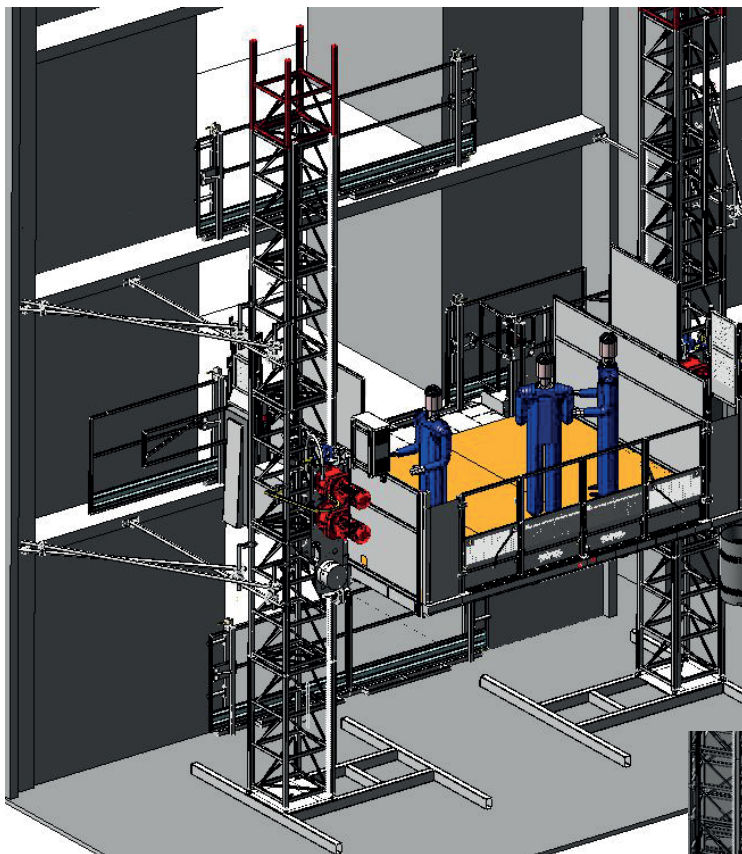

CAPACITÀ DI CARICO

	3200 kg	M
	+ 2420 kg	P+M
	+ 2340 kg	P+M
	+ 2260 kg	P+M
	+ 2180 kg	P+M
	+ 2100 kg	P+M
	+ 2020 kg	P+M
	+ 1940 kg	P+M

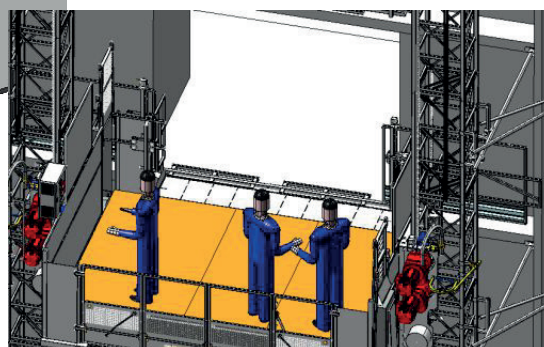

DATI TECNICI	TECHNICAL DATA	DONNEES TECHNIQUES	DATOS TECNICOS	PT 4000 TWIN TRIFASE
capacità di carico	capacity	charge nominale	capacidad de carga	4000 kg
velocità di sollevamento	lifting speed	vitesse de lévage	velocidad de elevación	12 m/min
massima altezza ancorata	max anchored height	hauteur max avec ancrages	altura max con anclajes	200 m
dimensioni interne cesta	platform dimensions	dimensions du plancher	dimensiones de cabina	3,2x3 m
tensione alimentazione	input power range	tension d'alimentation	tensión de red	400 V - 50 Hz
potenza motori	power of the motors	puissance des moteurs	potencia de motorreductores	4x7,5 kW
minima potenza di linea consigliata	minimum line power suggested	min. puissance de ligne conseillée	min. potencia linea	32 kW
ingrassatore automatico cremagliera	rack automatic greasing pump	graisseur automatique de cremallere	engrassador automatico de cremallera	su richiesta
sistema di sovraccarico	overload system	limiteur de charge	limitador de carga	✓